


DIRECTIONS FOR NISSAN KA24DE ENGINE BLOCK ADAPTER KIT

BILLET CONNECTION'S BLOCK ADAPTERS, THREAD ONTO THE OIL PAN WHERE THE STOCK DISPOSABLE OIL FILTER USUALLY GOES. THESE ADAPTERS ADAPT THE STOCK OIL FILTER OUTLET AND INLET OIL FEED HOLES TO FLOW THROUGH THREADED OPENINGS IN THE BILLET ADAPTERS. ADAPTERS THREAD ON REPLACING THE DISPOSABLE FILTER. HEX NUT MACHINED INTO BLOCK ADAPTER FOR EASY INSTALLATION OR REMOVAL. YOU CAN ALSO INSTALL THE CENTER FITTING AND USE A SOCKET TO INSTAL THE ADAPTER TO THE BLOCK.

THIS IS VERY IMPORTANT, IF INSTALLED WRONG IT COULD RESTRICT OIL FLOW AND DAMAGE THE ENGINE !!!
THE INLET AND OUTLET OPENINGS ARE ENGRAVED IN AND OUT. TO HOOK UP THE OIL LINES CORRECTLY, THE OUT OR OUTLET OPENING NEEDS TO BE HOOKED TO THE IN OR INLET OPENING OF THE REMOTE FILTER. THEN HOOK THE OUT OR OUTLET OF THE REMOTE FILTER TO THE IN OR INLET OPENING OF THE BLOCK ADAPTER. LOOK UP THE DISPOSABLE FILTER FOR APPLICATION TO MAKE SURE THE THREAD SIZE MATCHES THE ADAPTER

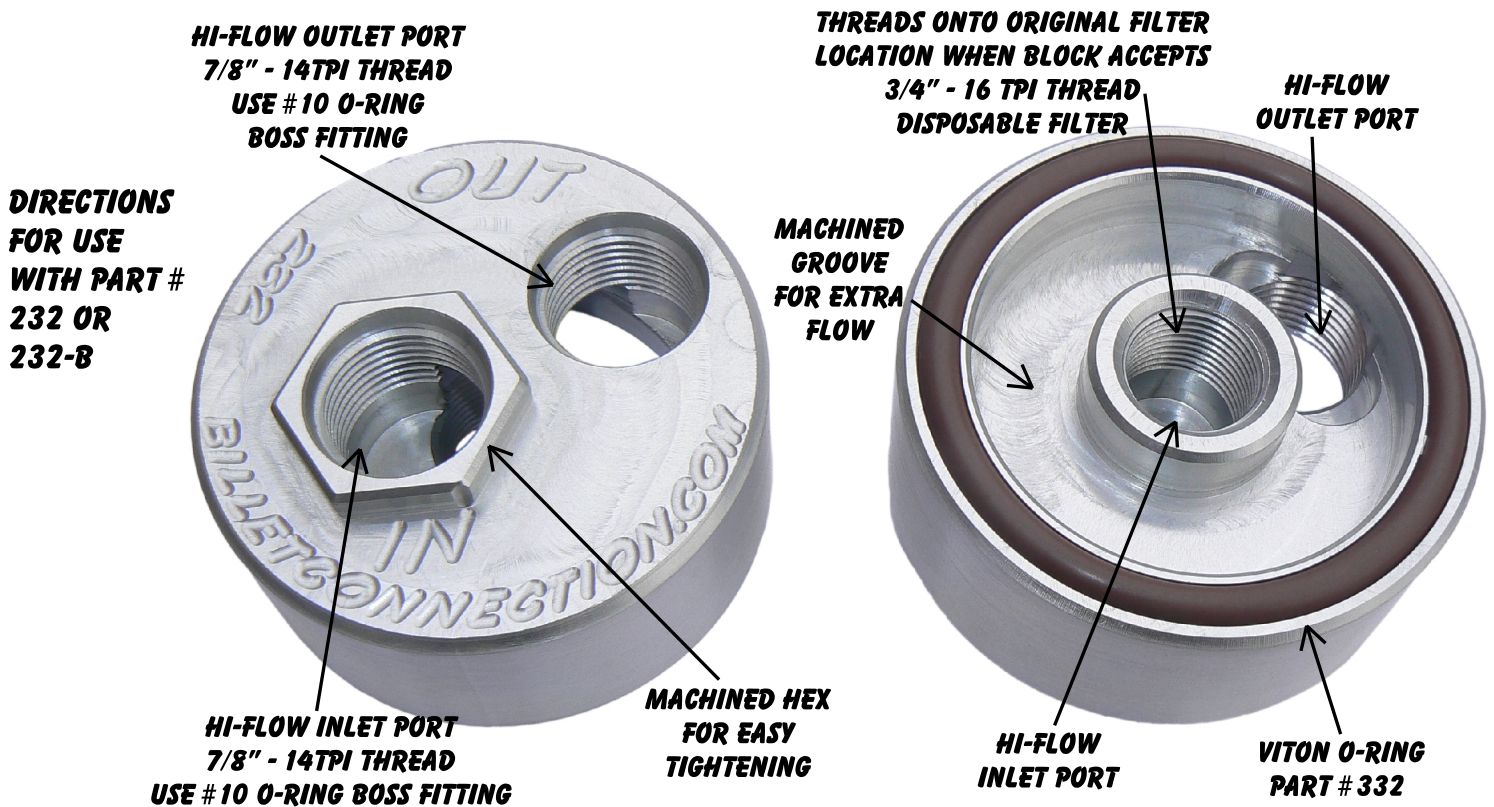

THE BLOCK ADAPTERS INLET AND OUTLET OPENINGS ARE THREADED TO 7/8" - 14 THREADS PER INCH, THIS THREAD USES A FITTING REFERRED TO AS #10 O-RING BOSS ON THE END THAT THREADS INTO THE BLOCK ADAPTER AND THE OTHER END CAN BE A #10 OR CAN BE A DIFFERENT STYLE AND OR SIZE OF FITTING, DEPENDING ON THE APPLICATION.

RECOMMENDED FITTING FOR BLOCK ADAPTERS A #10 O-RING BOSS TO A #10 AN MALE FITTING.

PART # 232 AND 232-B THREAD IN PLACE OF DISPOSABLE FILTER WITH THREAD SIZE: 3/4" - 16 TPI

MAKE SURE TO OIL O-RING ON THE BLOCK ADAPTER AND FITTINGS BEFORE INSTALL.

REPLACEMENT O-RING KIT AVAILABLE FOR THESE BLOCK ADAPTERS. O-RING KIT PART # 211.

CLEAR VIEW FILTRATION ALSO CARRIES FITTINGS, O-RINGS KITS AND FASTENERS NEEDED FOR THE BLOCK ADAPTERS. CHECK OUT OUR WEBSITE AT CLEARVIEWFILTRATION.COM FOR MORE PRODUCTS & MORE INFO.